





Foamlite® – Lightweight plastic sheets for greater benefits


Rochling has developed the closed-pore foamed material Foamlite® P especially for applications in which construction materials need to have a very low weight and have a high level of mechanical stability. This opens up a wide range of possibilities in lightweight design.

30 percent lighter than solid PP-C Sheets

Foamlite® P lightweight boards are nearly **30 percent lighter** than comparable compact sheets. Depending on the application, the lightweight plastic sheet saves on materials, conserves resources and is easy to handle. This gives you

- Completely new possibilities in the design of your application and in dimensioning
- As well as economic advantages.

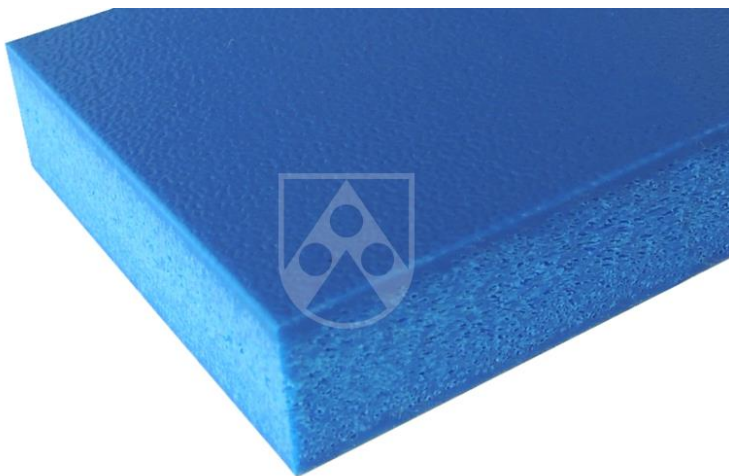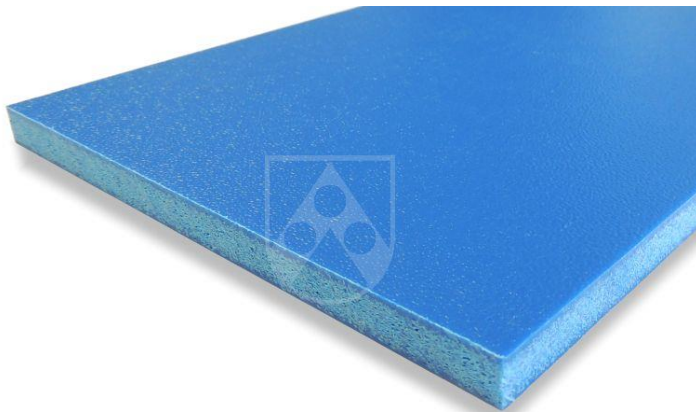

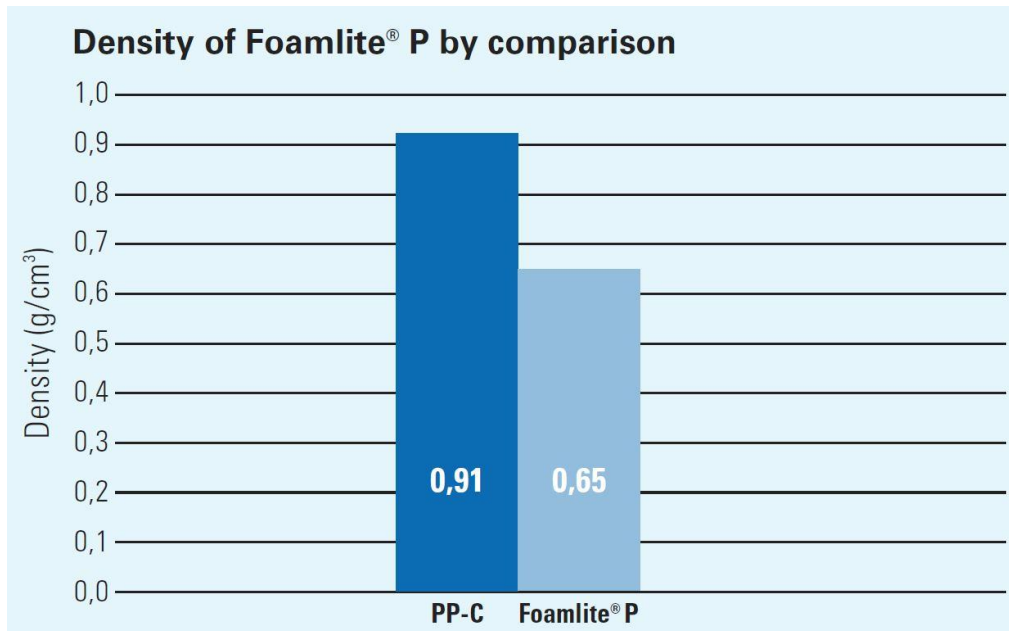

Applications

Flightcases

Flight case panels made of Foamlite® - for lightweight plastic flight cases



Advantages

With its many and varied properties, the lightweight board Foamlite® offers you advantages in construction and handling compared with other materials:

Low weight

- Density: 0,65 g/cm³
- Approximately 30 per cent less weight than compact sheets
- Advantages in construction and dimensioning & easy handling

Long service life

- UV-resistant
- Virtually no water absorption
- No decomposition, rotting or delamination
- Long-term dimensional stability

Superior surface quality

- Option of smooth surface or grained on both sides with high scratch resistance
- Slip-resistant surface „cubic grain“ available
- Long-lasting high-quality appearance

High mechanical strength

- Very good combination of toughness and rigidity

Good insulation properties


- Air bubbles in the foam core provide good thermal insulation and noise reduction

Easy processing


- Easy to machine with woodworking tools
- Good welding properties
- Low internal stress

Foamlite® P

Foamlite® P is a PP-C-based lightweight construction material. With a density of 0.65 g/cm³, Foamlite® P offers clear weight advantages over a sheet made of compact polypropylene at 0.915 g/cm³. The material also has an excellent combination of toughness, high rigidity, strength and chemical resistance. The surface is optionally available with a smooth finish or with a fine grain.

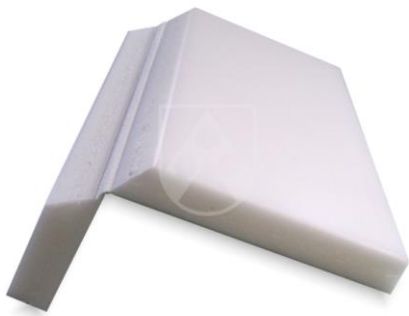

Integrated Hinge: Foamlite® P has an "integrated" hinge. It is sufficient to mill a simple 90-degree V-notch into it. The high bending fatigue strength of the material means that the hinge can be folded more than 40,000 times without breaking.

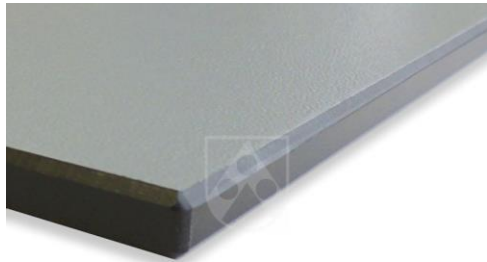


Sealable Cutting Edges: The open-pored cutting edges of Foamlite® P can be sealed on request in order to cater for specific requirements in terms of appearance and hygiene.

Foamlite® – Product variety

Foamlite® is available in special product variants which not only offer you low weight but are also ideal for use in a wide variety of applications.

Step safety

Foamlite® P “Cubic Grain”

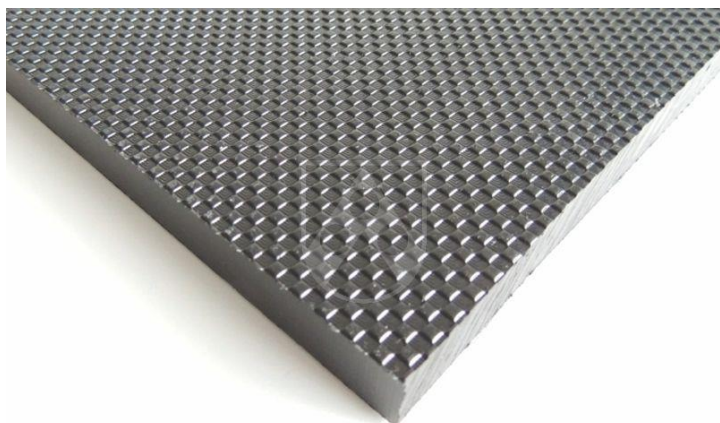

Foamlite® P is available in a slip-resistant design with the special "cubic grain" surface structure. The three-dimensional, cube-shaped grain ensures a mechanical frictional connection between floor and shoe. The **slip-resistant property** of Foamlite® "cubic grain" is **tested according to the following guidelines**:

- **DIN 51097**: Testing of floor coverings; determination of the anti-slip properties; wet loaded barefoot areas
- **DIN 51130**: Testing of floor coverings; determination of the anti-slip properties; work rooms and work areas with slip risk

Contact with food

Foamlite® P FG blue



Foamlite® P FG blue is a special material for the food industry. It meets the requirements of EU Regulation 10/2011 – Plastic materials and articles intended to come into contact with food – as well as the requirements of the US Food and Drug Administration (FDA). Its UV resistance makes Foamlite® P FG blue suitable for use in industrial food areas with UV-based hygiene systems. The material is available in blue (RAL 5010). Further colors on request.


Protection against electrostatic risks

Foamlite® P AST



We have developed Foamlite® P AST especially for areas where there is a need for controlled conductance of electrostatic charge and low weight at the same time. High voltage pulses can arise with uncontrolled electrostatic discharge and destroy sensitive equipment, components and workpieces. With Foamlite® P AST, these components are protected by controlled conductance of the electrostatic charge.

Foamlite® G

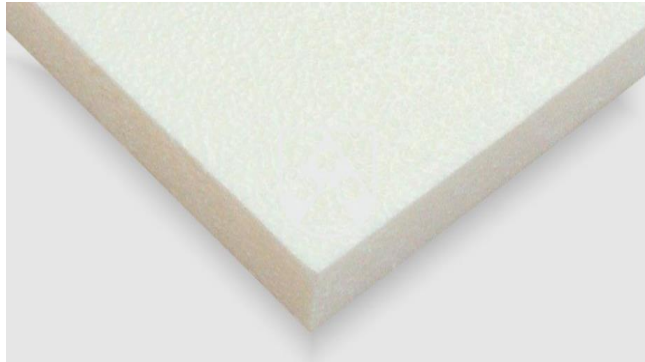

Foamlite® G is a **PE-HD-based** lightweight plastic sheet. With a density of 0.75 g/cm³, Foamlite® G has a **weight advantage** of more than 20 per cent compared with compact polyethylene at 0.95 g/cm³. The material boasts a superior **surface quality**, is optionally available with a smooth or grained finish and is **very easy to process**. At the same time, Foamlite® G can be welded with polyethylene (PE) very easily.

Production Range

Foamlite® P can be produced in many sizes, thicknesses and colors and with different properties. We are happy to make a product tailored to your individual requirements.

Dimensions:

- Sheet thicknesses: 6 – 21 mm
- Widths: up to 2,000 mm
- Length: theoretically unlimited

Colors:

- Foamlite® P can be produced in virtually any shade on request.
- Many product variants, dimensions and colors are available.

www.professionalplastics.com/Foamlite-P-Lightweight-PP-Sheet

Email: sales@proplas.com

USA (888) 995-7767 – Singapore +65 6266-6193 – 台灣 Taiwan +886 (3) 5357850