



Makrolon® 15 sheet

Extended abrasion and UV resistance

Makrolon® 15 sheet is a polycarbonate product that offers excellent impact resistance in high risk areas, weathering life, and optical quality. It provides a clear aesthetic advantage over wire glass and metal screens for security glazing. Makrolon 15 protects against vandalism, forced entry attempts or attacks, and accidental impacts to minimize the risk of theft and glass replacement in damage prone areas. Advanced manufacturing technology has resulted in high optical quality with minimal distortion in clear and standard glazing tints. The abrasion resistant coating, applied to both sides, provides up to twice the life of prior polycarbonate sheet products. Makrolon 15 sheet has a fifteen (15) year Limited Product Warranty against breakage, yellowing, and loss of light transmission. The terms of the warranty are available upon request.

Applications

Educational, psychiatric and medical facilities, retail and government buildings, and transportation centers at risk from breakage and vandalism

Regulatory code compliance and certifications

ANSI Z97.1-2009: American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test, Class A, Unlimited

CPSC 16 CFR 1201 Category I and Category II: Safety Standard for Architectural Glazing Materials

Florida Building Code 2014
High Velocity Hurricane Zone Classified
Miami-Dade NOA #15-1014.01

ICC-ES Evaluation report ESR-2728

UL 972: Burglary Resistant Glazing Materials, UL File #BP2126


Typical Properties*

Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	-	1.2
Light Transmission	ASTM D 1003	%	86
Chemical Resistance	ASTM D 1308	-	Pass
Taber Abrasion, 100 Cycles CS-10F	ASTM D 1044		
Delta Haze		%	2
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Modulus	ASTM D 638	psi	340,000
Flexural Strength	ASTM D 790	psi	13,500
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft-lbs/in	16
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft-lbs/in	60 (no failure)
Instrumented Impact @ 0.125"	ASTM D 3763	ft-lbs	>47
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 ⁻⁵
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280
FLAMMABILITY			
Horizontal Burn, AEB	ASTM D 635	in	<1
Ignition Temperature, Self	ASTM D 1929	°F	1022
Ignition Temperature, Flash	ASTM D 1929	°F	824

*Typical properties are not intended for specification purposes


Makrolon® 15 sheet

Impact Resistance*

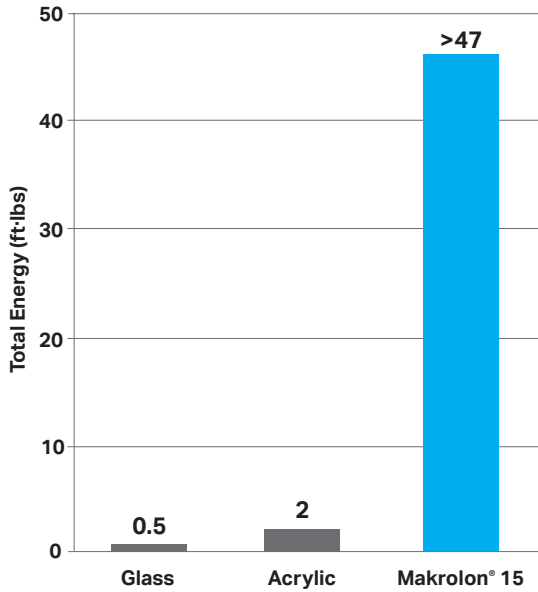

*Instrumented Impact per ASTM D 3763, sample thickness 0.125" nominal

Weather Behavior in Vertical Orientation

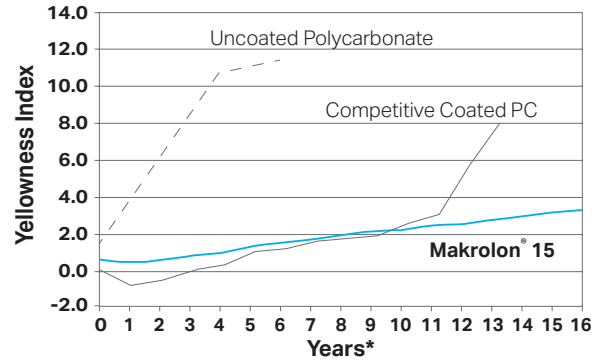

*Based upon Xenon WOM accelerated weathering for UV dose at mid-latitude location


Chemical Resistance*

Chemical Tested	Resistance Time
Acetone	>24 hrs
Ammonia (10% concentration)	>24 hrs
Antifreeze (50/50)	>24 hrs
Benzene	>24 hrs
Bleach (Clorox concentrated)	>24 hrs
Chloroform	>24 hrs
Denatured Alcohol	>24 hrs
Di (2-ethylhexyl) phthalate	>24 hrs
Diesel Oil	>24 hrs
Isopropyl Alcohol (IPA)	>24 hrs
Kerosene	>24 hrs
Methyl Alcohol	>24 hrs
Methyl Butyl Ketone	>24 hrs
Methyl Ethyl Ketone	>24 hrs
Methylene Chloride	>24 hrs
Naphthalene, 1-bromo-	>24 hrs
Potassium Hydroxide - Lye (10%)	>24 hrs
Sodium Hydroxide (10%)	>24 hrs
Toluene	>24 hrs
Turpentine	>24 hrs
Unleaded Gasoline (87 Octane)	>24 hrs
Vinegar	>24 hrs
Xylene	>24 hrs
Acids:	
Hydrochloric Acid (20%)	>24 hrs
Nitric Acid (20%)	>24 hrs
Sulfuric Acid (20%)	>24 hrs

*Tested in accordance to ASTM D 1308-02

Always keep hazardous chemicals away from uncoated edge of Makrolon Polycarbonate

Abrasion Resistance*

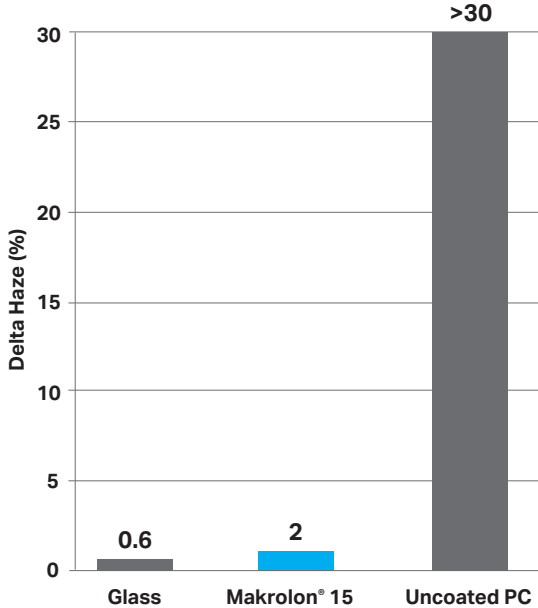

*Taber Abrasion per ASTM D 1044, 100 cycles, CS-10F wheel



119 Salisbury Road
 Sheffield, MA 01257
 Toll Free: 800.254.1707
 Fax: 800.457.3553
sfdinfo@covestro.com
sheets.covestro.com

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Covestro.

Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

With respect to health, safety and environment precautions, the relevant Safety Data Sheets (SDS) and product labels must be observed prior to working with our products.