


## KEY FEATURES

- Tapered and scalloped walls for a tight and secure fit
- Easy installation and removal without additional tools
- Cost-effective solution for temporary sealing
- Highly flexible material for easy installation by hand
- Constructed of long-lasting material
- Designed to release in a snap
- One size to fit multiple-size conduit

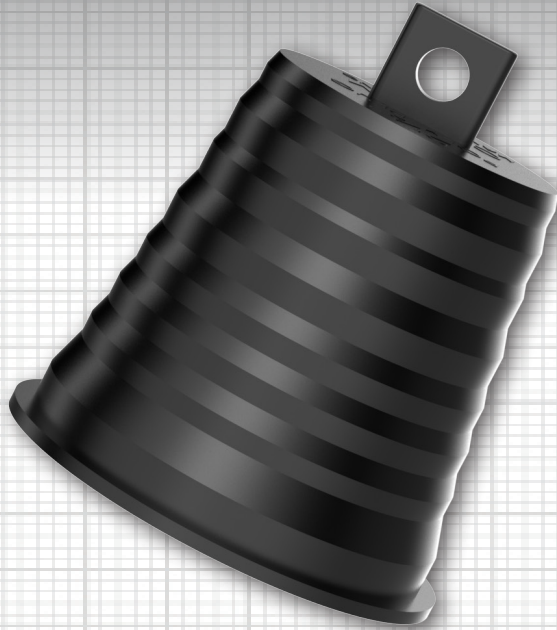

Highly flexible material for easy installation by hand

**Poly Plug**<sup>™</sup>  
Temporary Plugs

## The Poly Plug snap-in design protects exposed conduits and innerducts with ease

The Poly Plug<sup>™</sup> is designed to seal standard ducts, innerducts or terminators from the damaging and expensive effects of weather, job site debris, and animal incursion.

The tapered fit ensures an easy and snug installation, while the scalloped ridges create a snap-in seal to prevent accidental dislodging of the plug. The base of the plug features a sturdy flanged lip to easily remove the plug. All Poly Plugs have a designed-in rope-tie making mule tape or other line easy to tie-off and readily at-hand for future use.

Molded from Low Density Polyethylene (LDPE), a semi-pliable, high-impact, and chemically inert resin that has near-zero moisture absorption properties. LDPE is resistant to ultraviolet light, ozone, and is capable of withstanding extreme fluctuations in temperature.




Supplied by **Professional Plastics**

800.966.PROS

[ProfessionalPlastics.com](http://ProfessionalPlastics.com)

For product inquiry, email [ductbankquotes@proplas.com](mailto:ductbankquotes@proplas.com)

## SPECIFICATIONS

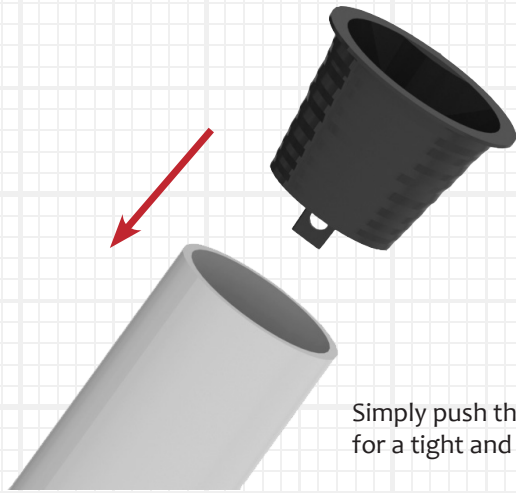

Simply push the Poly Plug™ into the conduit for a tight and secure temporary seal.

| PRODUCT NUMBER | EACH SIZE (IN) | EACH SIZE (mm) | CASE QUANTITY | UNIT OF MEASURE | CASE DIMENSIONS (IN) | CASE DIMENSIONS (cm) | COLOR |
|----------------|----------------|----------------|---------------|-----------------|----------------------|----------------------|-------|
| 2250-010       | 1.00           | 25             | 100           | CASE            | 11.0 x 9.0 x 5.0     | 27.9 x 22.9 x 12.7   | BLACK |
| 2250-012       | 1.25           | 32             | 100           | CASE            | 13.0 x 9.0 x 5.0     | 33.0 x 22.9 x 12.7   | BLACK |
| 2250-015       | 1.50           | 40             | 100           | CASE            | 13.0 x 9.0 x 7.0     | 33.0 x 22.9 x 17.8   | BLACK |
| 2250-15-B      | 1.50           | 40             | 100           | CASE            | 13.0 x 9.0 x 5.0     | 33.0 x 22.9 x 12.7   | BLACK |
| 2250-020L      | 2.00           | 50             | 100           | CASE            | 15.0 x 11.0 x 7.0    | 38.1 x 27.9 x 17.8   | BLACK |
| 2250-025       | 2.50           | 65             | 100           | CASE            | 17.0 x 13.0 x 9.0    | 43.2 x 33.0 x 22.9   | BLACK |
| 2250-030       | 3.00           | 80             | 80            | CASE            | 17.0 x 13.0 x 9.0    | 43.2 x 33.0 x 22.9   | BLACK |
| 2250-035       | 3.50           | 90             | 80            | CASE            | 18.0 x 12.0 x 12.0   | 45.7 x 30.5 x 30.5   | BLACK |
| 2250-040       | 4.00           | 100            | 50            | CASE            | 17.0 x 13.0 x 13.0   | 43.2 x 33.0 x 33.0   | BLACK |
| 2250-050       | 5.00           | 125            | 40            | CASE            | 17.0 x 13.0 x 13.0   | 43.2 x 33.0 x 33.0   | BLACK |
| 2250-060       | 6.00           | 150            | 30            | CASE            | 19.0 x 13.0 x 13.0   | 48.3 x 33.0 x 33.0   | BLACK |
| 2250-080       | 8.00           | 200            | 12            | CASE            | 19.0 x 13.0 x 13.0   | 48.3 x 33.0 x 33.0   | BLACK |

## APPLICABLE CONDUIT

| PRODUCT NUMBER | CONDUIT SIZE     | CONDUIT INNER DIAMETER RANGE         | APPLICABLE CONDUIT |            |            |            |           |              |              |           |     |                   |                    |                   |                    |            |             |               |               |           |   |   |
|----------------|------------------|--------------------------------------|--------------------|------------|------------|------------|-----------|--------------|--------------|-----------|-----|-------------------|--------------------|-------------------|--------------------|------------|-------------|---------------|---------------|-----------|---|---|
|                |                  |                                      | PVC SCH 40         | PVC SCH 80 | PVC DB 100 | PVC DB 120 | PVC DB 60 | PVC EB 20 TC | PVC EB 20 UL | PVC EB 35 | EMT | HDPE SCH 40 F2160 | HDPE SCH 40 UL651A | HDPE SCH 80 F2160 | HDPE SCH 80 UL651A | HDPE SDR 9 | HDPE SDR 11 | HDPE SDR 13.5 | HDPE SDR 15.5 | HDPE SDR9 |   |   |
| 2250-010       | 1.00"<br>[25mm]  | 0.75" - 1.34"<br>19.05mm - 34.03mm   | ✓                  | ✓          |            | ✓          |           |              |              |           |     | ✓                 | ✓                  | ✓                 | ✓                  | ✓          |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-012       | 1.25"<br>[32mm]  | 1.15" - 1.51"<br>29.21mm - 38.35mm   | ✓                  | ✓          |            |            |           |              |              |           |     | ✓                 | ✓                  | ✓                 | ✓                  | ✓          |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-015       | 1.50"<br>[40mm]  | 1.38" - 1.67"<br>35.05mm - 42.63mm   | ✓                  | ✓          |            | ✓          | ✓         |              |              |           |     | ✓                 | ✓                  | ✓                 | ✓                  | ✓          |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-15-B      | 1.50"<br>[40mm]  | 1.28" - 1.93"<br>32.51mm - 49.20mm   | ✓                  | ✓          |            | ✓          | ✓         |              |              |           |     | ✓                 | ✓                  | ✓                 | ✓                  | ✓          |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-020L      | 2.00"<br>[50mm]  | 1.87" - 2.41"<br>47.49mm - 61.29mm   | ✓                  | ✓          |            | ✓          | ✓         |              |              | ✓         | ✓   | ✓                 | ✓                  | ✓                 | ✓                  |            |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-025       | 2.50"<br>[65mm]  | 2.23" - 2.94"<br>56.64mm - 74.77mm   | ✓                  | ✓          |            |            |           |              |              |           |     | ✓                 | ✓                  | ✓                 |                    |            | ✓           | ✓             | ✓             | ✓         |   |   |
| 2250-030       | 3.00"<br>[80mm]  | 2.87" - 3.54"<br>72.89mm - 89.91mm   | ✓                  | ✓          | ✓          | ✓          | ✓         | ✓            | ✓            | ✓         | ✓   | ✓                 | ✓                  | ✓                 | ✓                  |            |             | ✓             | ✓             | ✓         | ✓ | ✓ |
| 2250-035       | 3.50"<br>[90mm]  | 3.24" - 3.95"<br>82.29mm - 100.43mm  | ✓                  | ✓          | ✓          | ✓          | ✓         | ✓            | ✓            | ✓         | ✓   |                   | ✓                  |                   | ✓                  |            |             |               |               |           |   |   |
| 2250-040       | 4.00"<br>[100mm] | 3.55" - 4.63"<br>90.17mm - 117.60mm  | ✓                  | ✓          | ✓          | ✓          | ✓         | ✓            | ✓            | ✓         | ✓   | ✓                 | ✓                  | ✓                 | ✓                  |            |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-050       | 5.00"<br>[125mm] | 4.35" - 5.64"<br>110.49mm - 143.50mm | ✓                  | ✓          | ✓          | ✓          | ✓         | ✓            | ✓            | ✓         | ✓   |                   | ✓                  | ✓                 | ✓                  | ✓          |             | ✓             | ✓             | ✓         | ✓ |   |
| 2250-060       | 6.00"<br>[150mm] | 5.48" - 6.82"<br>139.19mm - 173.30mm | ✓                  | ✓          | ✓          | ✓          | ✓         | ✓            | ✓            | ✓         | ✓   |                   | ✓                  | ✓                 | ✓                  | ✓          |             |               | ✓             | ✓         |   |   |
| 2250-080       | 8.00"<br>[200mm] | 7.21" - 8.30"<br>183.13mm - 210.82mm | ✓                  | ✓          |            |            |           |              |              |           |     |                   |                    |                   |                    |            |             |               |               |           |   |   |

### ABOUT CAL AM MANUFACTURING

Cal Am Manufacturing® specializes in products for use in underground electrical and broadband applications. Founded in Southern California over 35 years ago, Cal Am designs and produces fittings and sealing devices to serve utilities, municipalities, government facilities, data centers, and fiber optic projects, through a worldwide network of distributors.

**ORDERS & INQUIRIES: CONTACT PROFESSIONAL PLASTICS TODAY!**

Professional Plastics, Inc. is a global distributor of Cal Am products.

CONTACT US AT:  
800.966.PROS  
ductbankquotes@proplas.com

ORDER ONLINE:  
professionalplastics.com