

VOLCANO WRAP

- High Temperature Resistance
- Easy To Install
- Resists Gasoline And Engine Chemicals
- Great Appearance

Put-Ups

Widths	Part #	Wall Thickness	Expansion Range		Bulk Spool 1	Bulk Spool 2	Bulk Spool 3	Available Colors	Lbs/100'
			Min.	Max.					
1"	VWN1.00BA	1/16"	This is a		100'	50'	25'	Basalt	1.70
2"	VWN2.00BA	1/16"	non-expandable product.		100'	50'	25'	Basalt	3.20

Woven Volcanic Rock Tape Withstands Heat Up To 1,500°F

VOLCANO WRAP (VW) is made from continuous filament basalt fiber and is engineered for protection from temperatures 1,500°F. When wrapped around exhaust pipes, the unique construction creates attractive and durable finished product.


Volcano Wrap is 25% stronger and provides a 300°F increase in temperature protection over fiberglass wrap. The product is very rugged, and will not exhibit any vibration damage over long period of use.

The volcanic rock fiber wrap is easy to install and will provide years of protection and good looks.

■ **Colors Available:**
Basalt (BA)



Cut Cleanly
Scissors

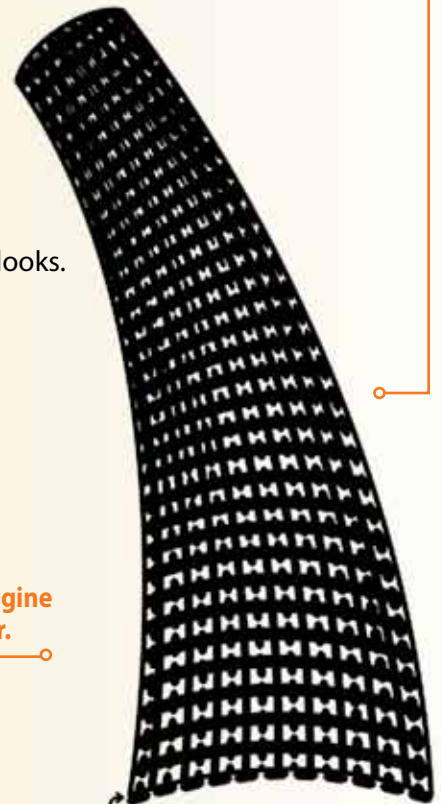

Wall Thickness

■ **Volcano Wrap helps redirect the heat every race or every day in production, keeping engine areas cooler and performance results better.**

Material	Basalt Fiber
Grade	VWN
Wall Thickness	.0625"



VOLCANO WRAP



Abrasion Resistance
NA

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g



Rating _____ Non Flammable




Chemical Resistance

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

- Aromatic Solvents _____ 1
- Aliphatic Solvents _____ 1
- Chlorinated Solvents _____ 1
- Weak Bases _____ 1
- Salts _____ 1
- Strong Bases _____ 1
- Salt Water 0-S-1926 _____ 1
- Hydraulic Fluid MIL-H-5606 _____ 1
- Lube Oil MIL-L-7808 _____ 1
- De-Icing Fluid MIL-A-8243 _____ 1
- Strong Acids _____ 2
- Strong Oxidants _____ 2
- Esters/Keytones _____ 1
- UV Light _____ 2
- Petroleum _____ 1
- Fungus ASTM G-21 _____ 1
- Halogen Free _____
- RoHS _____
- SVHC _____

Melt Point
ASTM D-2117
2,400°F (1,316°C)

Maximum Continuous
MIL-I-23053
1,200°F (649°C)

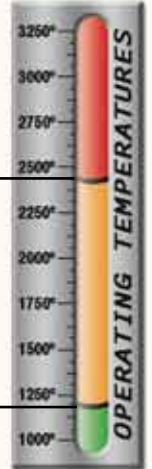

PHYSICAL PROPERTIES

- Monofilament Diameter _____ NA
ASTM D-204
- Flammability Rating _____ Non Flammable
- Recommended Cutting _____ Scissor
- Colors _____ 1
- Wall Thickness _____ .06

www.techflex.com