

Smooth, bright white surface is chemical, mold, bacterial and water resistant.

Duraclad is stronger than other PVC liner panels with thicker inner walls.

Warranted for 20 years, and easy to maintain.

Class A fire rating.

Secure tongue and groove design with hidden fasteners for easy installation that allows for expansion and contraction.

Stronger by Design.

Overview

Duraclad® interlocking wall and ceiling liner panels feature a multiwall structure that results in a high level of rigidity and strength, and allows for rapid installation. Interlocking tongue & groove edges permit fasteners to be completely hidden, resulting in a clean, smooth finish. Use it for interior cladding for all types of structures.

Duraclad's resistance to chemicals allows for frequent cleaning and sanitary maintenance, as well as extended service in harsh chemical environments.

From processing plants and laboratories to dairy and poultry farms, wineries, car washes and more, Duraclad holds up where other products won't.

Main Benefits

- Rapid tongue and groove installation
- Fasteners are completely hidden
- Easy to clean/sanitize smooth surface
- Waterproof, rust-proof
- Excellent chemical resistance
- Resists gases and chemicals emitted by animal waste
- Excellent light reflectance
- Attractive high-gloss white finish
- Non-flammable



Typical Applications


- Dairy, Hog, and Poultry Farms
- Fisheries
- Factories & Industrial Buildings
- Barns
- Food Processing
- Meat Packing
- Chemical Processing Plants
- Laboratories
- Car & Truck Washes
- Indoor Grow Operations
- Fertilizer Storage
- Workshops
- Kennels
- Marinas
- Refrigerated Warehouses
- Laundromats



Product Availability

Standard Stock	Imperial	Metric
Panel Width	16"	406mm
Panel Length(s)	8', 10', 12', 16', 20'	2.44m, 3.05m, 3.66m, 4.88m, 6.01m
Thickness	0.50 in. (1/2")	12.7mm
Standard Color	Bright White	

Panel Profile

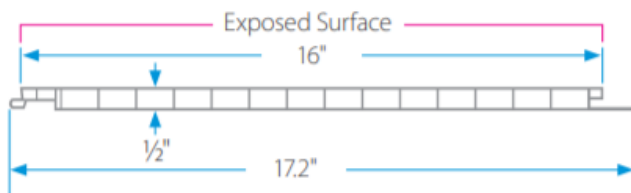

Special Orders Also Available*

Width:	16" (406 mm)
Length:	Up to 20'
Thickness:	0.50 in. (12.7mm)
Colors:	Bright White

* Special orders available; subject to surcharge and/or minimum order requirements.

Regulatory Code Compliance Certification

Organization	Standard	Classification
ASTM	E84-17a	Class A
ASTM	D635-74	CC1
FDA/USDA	Walls & Ceilings	Pass
CFIA	Walls & Ceilings	No longer required†
ASTM	D3273-16	10 (resistant to mold)

† The CFIA office is closed and no longer pre-approves construction materials, packaging materials, non-food chemicals and working apparel. The reference listing continues to be available on the CFIA website as a reference only; however, the list is no longer maintained. Learn more at www.inspection.gc.ca.

Product Highlights

Surface is smooth, clean-looking and easy to maintain.

Heavy duty flange with slotted fastener holes allow for expansion & contraction.



"Tongue-&-Groove" sides interlock for simple, rapid installation.

Fasteners are concealed for a clean look.

Installation Accessories

For optimum performance and durability, use Palram Duraclad® installation accessories.



Base Trim




Inside Corner



Outside Corner



J-Trim



H-Divider



F-Trim



3/16" x 1/4" Tapcon® Screw with a stainless steel washer (1/4" ID. x 1/2" OD. x 1/32" thick) (supplied by others)



#8 or #10 x 1/4" Stainless Steel Screw with 1/2" dia. low profile screw head (supplied by others)

20 Year Limited Warranty

Duraclad carries a manufacturer's 20 year limited warranty. See warranty for complete details.



www.professionalplastics.com/Duraclad-Multiwall-Interlocking-PVC-Panels

sales@proplas.com

USA (888) 995-7767 – Singapore +65 6266-6193 – 台灣 Taiwan +886 (3) 5357850