


## SEMITRON® POM CNT

# NEW

from QUADRANT

### STATIC DISSIPATIVE HIGH PERFORMANCE EXTRUDED ACETAL COPOLYMER

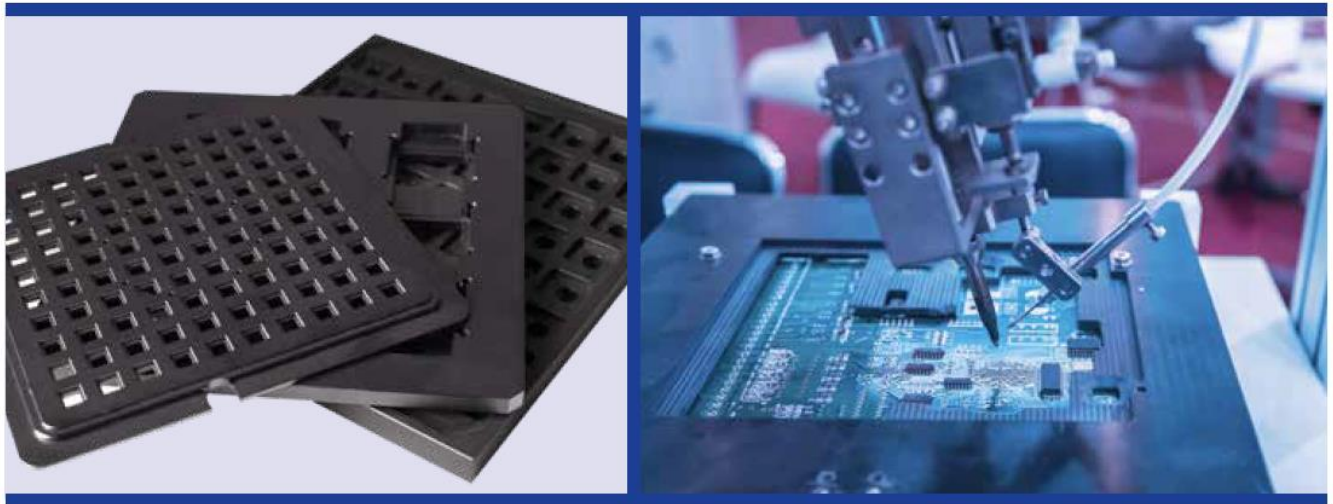

Semitron® POM CNT is an extruded Static Dissipative POM C based polymer system developed specifically for electronic fixture applications that require a precise surface resistivity range yet offering increased dimensional stability vs conventional POM ESD products.

#### KEY BENEFITS

- Flexural Modulus of 350,000 psi with an HDT of 225 @ 264 psi
- Extremely low moisture absorption of 0.25% @ 24 hours and 0.75% @ saturation

#### COMMON APPLICATIONS

- Integrated Chip Test Jigs
- Basic Electronics Assembly Fixturing
- Basic Test Sockets & PCB Test Jigs




#### SEMITRON® POM CNT ADVANTAGES



## DATA SHEET

Properties	ASTM Test Method	Semitron® ESd225 POM	Semitron® POM CNT	Semitron® ESd300 PET	Semitron® HPV PEEK
Melting Point (°F)	D3418	320	335	485	644
Surface Resistivity (Ω/sq)	-	10 <sup>6</sup> ~10 <sup>9</sup>	10 <sup>6</sup> ~10 <sup>9</sup>	10 <sup>6</sup> ~10 <sup>9</sup>	10 <sup>6</sup> ~10 <sup>9</sup>
HDT @ 264psi (°F)	D648	225	225	~300	383
Hardness Rockwell @73°F	D785	M50	M71	R1256	M90
CLTE (in/in/°F, X 10 <sup>-5</sup> )	E-831	9.3	7.6	5.5	2.2
Flexural Modulus (psi)	D790	220,000	350,000	477,000	1,075,000
Tensile Strength (psi)	D638	5,400	7,500	12,000	14,750
Tensile Mod. of Elasticity (psi)	D638	200,000	340,000	490,000	1,100,000
Water Absorption (% by wt.)	D570	2.0	0.25	0.07	0.05
Water Absorption at Saturation (% by wt.)	D570	8.0	0.75	0.12	0.35
Relative Price (\$)	-	\$	\$	\$\$\$	\$\$\$\$

(1) Semitron® HPV PEEK data based on preliminary testing.

 - Advantage  - Strong Advantage  - Best in Class

## SEMITRON® POM CNT AVAILABLE SIZES

	Thickness	Plate Size (mm.)	Plate Size (in.)	
Semitron® POM CNT	5mm	610 x 2000	24" x 79"	MTO
	7mm/0.25"	610 x 2000	24" x 79"	MTO
	10mm	610 x 2000	24" x 79"	Standard
	12mm/0.5"	610 x 2000	24" x 79"	Standard
	15mm	610 x 2000	24" x 79"	Standard
	20mm	610 x 2000	24" x 79"	Standard
	25mm/1.0"	610 x 2000	24" x 79"	Standard
	30mm/1.25"	610 x 2000	24" x 79"	Standard
	35mm	610 x 2000	24" x 79"	Standard
	40mm	610 x 2000	24" x 79"	Standard
	45mm	610 x 2000	24" x 79"	Standard
	50mm/2.0"	610 x 2000	24" x 79"	Standard

\* 1000 mm (39.5") length plate can be made to order

All statements, technical information and recommendations contained in this publication are presented in good faith, based upon tests believed to be reliable and practical field experience. The reader is cautioned, however, that Quadrant Engineering Plastic Products does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of Quadrant's products in any given application. Semitron® is a registered trademark of the Quadrant group of companies.

Design and content created by Quadrant Engineering Plastic Products and are protected by copyright law.  
Copyright © The Quadrant group of companies. All rights reserved.  
02074 | 6.29.18

[www.professionalplastics.com](http://www.professionalplastics.com)

[sales@proplas.com](mailto:sales@proplas.com)

USA (888) 995-7767 – Singapore +65 6266-6193 – 台灣 Taiwan +886 (3) 5357850